

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>C08F 2/34, 4/648, 10/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 95/13305</b> <b>(43) International Publication Date:</b> 18 May 1995 (18.05.95)
<b>(21) International Application Number:</b> PCT/US94/12586 <b>(22) International Filing Date:</b> 3 November 1994 (03.11.94)  <b>(30) Priority Data:</b> 148,309 8 November 1993 (08.11.93) US 154,069 18 November 1993 (18.11.93) US  <b>(71) Applicant:</b> MOBIL OIL CORPORATION [US/US]; 3225 Gallows Road, Fairfax, VA 22037-0001 (US).  <b>(72) Inventors:</b> CHERUVU, Subrahmanyam; 5 Greenfield Drive North, Robbinsville, NJ 08691 (US). LO, Frederick, Yip- Kwai; P.O. Box 752, Edison, NJ 08818 (US). ONG, Shimay, Christine; 26 Glenview Avenue, Warren, NJ 07059 (US).  <b>(74) Agents:</b> SUNG, Tak, K. et al.; Mobil Oil Corporation, 3225 Gallows Road, Fairfax, VA 22037-0001 (US).		<b>(81) Designated States:</b> AU, CA, CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> PROCESS FOR THE POLYMERIZATION OR COPOLYMERIZATION OF ETHYLENE  <b>(57) Abstract</b>  In gas phase polymerizations and copolymerizations of ethylene, reagents or cofeeds control the molecular weight, expressed as MI (wherein MI is measured according to ASTM D-1238 Condition E), of the resin product. Use of isopentane and electron donating compounds reduce MI; whereas, water and electron withdrawing compounds increase MI.		

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	MG	Madagascar	TJ	Tajikistan
DE	Germany	ML	Mali	TT	Trinidad and Tobago
DK	Denmark	MN	Mongolia	UA	Ukraine
ES	Spain			US	United States of America
FI	Finland			UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

Process for the Polymerization or  
Copolymerization of Ethylene

This invention relates to a process for the polymerization  
5 or copolymerization of ethylene.

Polyethylene is produced commercially in a gas phase  
reaction in the absence of solvents by employing selected  
chromium and titanium-containing catalysts under specific  
operating conditions in a fluid bed process. Polyethylene  
10 products of such commercial processes exhibit medium-to-broad  
molecular weight distribution. To be commercially useful in the  
gas phase fluid bed process, or a slurry reactor process,  
undertaken at low pressures, e.g. of less than about 1000 psi,  
the catalyst must exhibit high activity, with concomitant high  
15 catalyst productivity, because these process systems do not  
include catalyst residue removal procedures. Accordingly,  
catalyst residue in the polymer product must be so small that  
it can be left in the polymer without causing any undue problems  
in the fabrication and/or to the ultimate consumer.

20 The need for new catalysts lead to the development of  
metallocene compounds of transition metals as catalysts for  
polymerization and copolymerization of ethylene. Metallocenes  
can be described by the empirical formula  $Cp_mMA_nB_p$ . These  
compounds in combination with alumoxane have been used to  
25 produce olefin polymers and copolymers, such as ethylene and  
propylene homopolymers, ethylene-butene and ethylene-hexene  
copolymers: see, for example US-A-4542199 and US-A-4404344.

Methylalumoxane (MAO) is commonly used as co-catalyst with  
metallocene catalysts. It belongs to the class of alumoxanes  
30 which comprises oligomeric linear and/or cyclic alkylalumoxanes  
represented by the formula:

$R-(Al(R)-O)_n-AlR_2$  for oligomeric, linear alumoxanes and  
 $(-Al(R)-O)_m$  for oligomeric cyclic alumoxane

wherein n is 1-40, preferably 10-20, m is 3-40, preferably 3-20  
35 and R is a  $C_1-C_8$  alkyl group and preferably methyl.

Methylalumoxane is commonly produced by reacting  
trimethylaluminum with water or with hydrated inorganic salts,

- 2 -

such as  $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$  or  $\text{Al}_2(\text{SO}_4)_3 \cdot 5\text{H}_2\text{O}$ . Methylalumoxane can be also generated in situ in polymerization reactors by adding to them trimethylaluminum and water or water-containing inorganic salts. MAO is a mixture of oligomers with a very wide distribution of  
5 molecular weights and usually with an average molecular weight of about 1200. MAO is typically kept in solution in toluene. While the MAO solutions remain liquid at fluid bed reactor temperatures, the MAO itself is a solid at room temperature.

Most of the experiments reported in the literature relating  
10 to methylalumoxane used as a cocatalyst with metallocene catalysts are undertaken in a slurry or solution process, rather than in a gas phase fluid bed reactor process.

It is desirable to control the MI of the polymerisation products, because such control provides a method of meeting  
15 target molecular weights, which vary for different applications. Generally, a low MI product is used for producing tough films. However, depending on the fabrication means and method, polyethylene (and its copolymers) of different MI will be required. For example for blown film production, the  
20 polyethylene target MI ranges from 0.6 to about 2. By comparison, for cast film production the polyethylene target MI ranges from 2.5 to 3.5. When the application is injection moulding, and target MI ranges up to 150, usually from 10 to 120, hydrogen may be used to control MI.

25 The present invention is predicated upon the discovery that certain reagents can alter the MI of the polymerized product: more specifically, isopentane and electron donating compounds lead to a decrease in MI; and water and electron withdrawing compounds leads to an increase in MI.

30 This discovery enables control of the polymerization process to adjust MI.

According to the present invention, there is provided a process for the polymerization of ethylene or the copolymerization of ethylene with an alpha olefin of 3 to 10  
35 carbon atoms, produces resin having a MI (g/10 min.) value in the range of 0.0001 to 500, (wherein MI is , wherein the process comprises:

- 3 -

- (a) fluidizing a particulate, activated supported metallocene catalyst, in a fluid bed gas phase reactor, wherein the catalyst comprises a support, a transition metal ( $M_{Tr}$ ) and Al, wherein the amount of  $M_{Tr}$  (elemental basis) ranges from 0.001 to 10 weight percent, the amount Al (elemental basis) ranges from 1 to 40 weight percent and the Al: $M_{Tr}$  ratio (elemental basis) ranges from 25 to 10000;
- (b) contacting said catalyst with a feed selected from the group consisting of (1) ethylene, (2) ethylene admixed with hydrogen, (3) ethylene admixed with an alpha olefin of 3 to 10 carbon atoms, and (4) ethylene admixed with hydrogen and an alpha olefin of 3 to 10 carbon atoms, to produce polymerized product;
- (c) maintaining a polymerization pressure of less than 1000 psi (6.9 MPa) and a polymerization temperature in the range of 55°C to 115°C;
- (d) contacting the fluidized catalyst with a reagent to increase or decrease the MI of the polymerized product; and
- (e) recovering polymerized product.

It may be possible to operate the polymerization temperature in the range 50°C to 115°C.

In one embodiment the reagent is isopentane and/or an electron donating compound to decrease the MI of the polymerized product. Preferably, the isopentane is used at a partial pressure of from 2 to 80 psi (14 to 550 KPa).

Preferably, the electron donating compound is used in an amount ranging from 0.01 to 500 ppm molar ratio to ethylene.

Desirably, the electron donating compound is selected from the group consisting of oxygen, carbon monoxide and carbon dioxide.

It is preferred that the isopentane is co-fed with the electron donating compound, which is selected from the group consisting of oxygen, carbon monoxide and carbon dioxide.

In another embodiment the reagent is water and/or an electron withdrawing compound to increase the MI of the

- 4 -

polymerized product.

The invention is applicable to high or low pressure gas phase processes (but with pressure < 1000 psi [6.9 Mpa]), in which molecular weight control of olefin polymers (or  
5 copolymers), produced in the presence of a metallocene catalyst, is effected by controlling the MI of the resulting polymer.

In a preferred embodiments, the process is undertaken in a low pressure fluid bed process for catalytic polymerization or copolymerization of ethylene, in the presence of metallocene  
10 catalysts.

The catalyst is a supported catalyst, wherein the support is preferably silica, alumina or silica/alumina: the support is preferably also amorphous and porous. In the preferred catalyst the support is silica.

15 The MI can additionally be controlled by controlling the polymerization temperature within said range of 55°C to 115°C, the polymerization temperature being selected to be at the higher end of the range to produce product of relatively low MI, and the polymerization temperature being selected to be at the  
20 lower end of the range to produce product of relatively high MI.

For increasing the MI of products produced during the polymerization process, the temperature of polymerization is decreased. Thus, if the product MI would be about 0.02 and the need for increasing the product MI above 0.02 is present, then  
25 the polymerization is undertaken at temperatures at the lower end of the range of 55°C to 115°C.

For example, the temperature may have to be above 65°C to produce a product MI of less than 4, above 70°C to produce a product MI of less than 3 and above 75-80°C to produce a product  
30 MI of less than 2. Conversely, the temperature may have to be below 100°C to produce a product MI of greater than 0.5, below 90°C to produce a product MI of greater than 1 and below 75-80°C to produce a product MI of greater than 2.

The polymerization temperature may be in the range 65 to  
35 90°C, preferably 75 to 80°C.

The polymerization product according to the invention generally has a MI in the range 0.0001 to 500, preferably 0.1

- 5 -

to 500, more preferably 0.1 to 200. Of particular interest are products having a MI in the range of 0.02 to 20.0. It is especially preferred that the MI is in the range of 0.05 to 10, particularly 0.05 to 5.

5 In accordance with another aspect of the invention there is provided a polymerization product made by the process defined above, said product having a MI less than 500, a settled bulk density in the range of 22 to 36 lb/ft<sup>3</sup> (350 to 580 kg/m<sup>3</sup>) and a density less than 0.94 g/cm<sup>3</sup>.

10 For decreasing the MI of products produced during the polymerization process, the temperature of polymerization is increased. Thus, if the product MI would be about 10 and the need for decreasing the product MI is present, then the polymerization is undertaken at temperatures at the higher end  
15 of the range of 55°C to 115°C. The temperature range of the process is dependent on the product density. For example, 60 to 90°C is typical for low density (<0.930) products.

As described above, the reagents which are used to decrease MI are electron donating in effect: a preferred group of  
20 reagents include oxygen and organic compounds containing oxygen atoms. The reagents which are used to increase MI are electron withdrawing in effect.

In the process according to the invention, the activated catalyst is fluidized by diffusing gas, e.g., recycle gas,  
25 through the bed at a rate sufficient to maintain fluidization. Fluidization can be achieved by a high rate of gas recycle to and through the bed, typically in the order of about 200 times the rate of feed of make-up gas.

The olefin feed to the reaction zone of the polymerization  
30 reactor comprises ethylene. Ethylene polymers, as well as copolymers of ethylene with one or more C<sub>3</sub>-C<sub>10</sub> alpha-olefins, can be produced in accordance with the invention. Thus, copolymers having two monomeric units are possible as well as terpolymers having three monomeric units. Particular examples of such  
35 polymers include ethylene/1-butene copolymers, ethylene/1-hexene copolymers and ethylene/4-methyl-1-pentene copolymers. Ethylene/1-butene and ethylene/1-hexene copolymers are the most

- 6 -

preferred copolymers polymerized in the process of and with the catalyst of this invention.

The ethylene copolymers produced in accordance with the present invention preferably contain at least about 80 percent  
5 by weight of ethylene units. The catalyst of this invention may be used to polymerize propylene and other alpha-olefins and to copolymerize them. Preferably, the polymerization (copolymerization) is undertaken at a temperature and/or pressure below the sintering temperature of the polymer  
10 particles.

In the general type of polymerization process described herein, pressures are below 10000 psi (69MPa), preferably below 1000psi (6.9 MPa). In low pressure polymerization pressures of up to about 1000 psi (6.9 MPa) are employed.

15 In accordance with the invention, the fluid bed reactor is operated at pressures of up to about 1000 psi (6.9 MPa). In low pressure polymerization carried out in accordance with the process of the invention pressures are below 400 psi (2.8 MPa), and preferably operation is at a pressure of from about 150 to  
20 350 psi (1 to 2.4 MPa); operation at the higher pressures in such ranges favours heat transfer, since an increase in pressure increases the unit volume heat capacity of the gas. The high activity of the catalysts allow for efficacious low pressure fluid bed gas phase polymerizations.

25 Much lower activity catalysts may be employed in high pressure processes at pressures which exceed 400 psi (2.8 MPa), such as solution and high pressure slurry polymerizations.

For the production of ethylene copolymers in the process of the present invention an operating temperature of about 55°  
30 to 115°C is used. Generally, temperatures of 60° to 90°C are used to prepare products having a density of 0.91 to 0.92; temperatures of 70° to 100°C are used to prepare products having a density of 0.92 to 0.94, and temperatures of 80° to 115°C are used to prepare products having a density of 0.94 to 0.96.

35 The partially or completely activated catalyst is preferably injected into the fluid bed at a point above the distribution plate at a rate equal to its consumption. Since



- 7 -

the catalysts used in the practice of this invention are highly active, injection of the fully activated catalyst into the area below the distribution plate may cause polymerization to begin there and eventually cause plugging of the distribution plate.

5 Injection into the bed, instead, aids in distributing the catalyst throughout the bed and precludes the formation of localized spots of high catalyst concentration.

The production rate of polymer in the bed is controlled by the steady state rate of catalyst and monomer injection. Since  
10 any change in the rate of catalyst injection changes the rate of generation of the heat of reaction, the temperature of the recycle gas is adjusted to accommodate the change in rate of heat generation. Complete instrumentation of both the fluidized bed and the recycle gas cooling system is, of course, necessary  
15 to detect any temperature change in the bed so as to enable the control system to make a suitable adjustment in the temperature of the recycle gas. Since the rate of heat generation is directly related to product formation, a measurement of the temperature rise of the gas across the reactor (the difference  
20 between inlet gas temperature and exit gas temperature) is determinative of the rate of particulate polymer formation at a constant gas velocity.

The reagents which are used to decrease MI, compared to the MI of products produced in the absence of said reagents, are  
25 isopentane and compounds which are electron donating in effect.

Electron donating compounds which have been used and which do decrease MI include oxygen, carbon dioxide, carbon monoxide. A preferred group of reagent compounds which are electron donating in effect include organic compounds which include  
30 oxygen atoms. Electron donating reagents which may be used include CO, CO<sub>2</sub>, NO, NO<sub>2</sub>, N<sub>2</sub>O ethers, alcohol, peroxides, ketones, esters, thioethers, amines, phosphines, phosphine oxides, and phenols.

The general formulas for these electron donating reagents  
35 are: ROR<sup>1</sup>, ROH, ROOR<sup>1</sup>, RCOR<sup>1</sup>, RCOOR<sup>1</sup>, RSR<sup>1</sup>, RR<sup>1</sup>R<sup>2</sup>N, RR<sup>1</sup>R<sup>2</sup>P, RR<sup>1</sup>R<sup>2</sup>PO where

R-CH<sub>3</sub>, C<sub>2</sub>H<sub>5</sub>, n-C<sub>3</sub>H<sub>7</sub>, i-C<sub>3</sub>H<sub>7</sub>, n-C<sub>4</sub>H<sub>9</sub>, i-C<sub>4</sub>H<sub>9</sub>, t-C<sub>4</sub>H<sub>9</sub>, C<sub>6</sub>H<sub>5</sub> or

- 8 -

other alkyl substituted aryl group;

Where  $R^1$  and  $R^2$  may be the same or different, and may be H,  $CH_3$ ,  $C_2H_5$ ,  $n-C_3H_7$ ,  $i-C_3H_7$ ,  $n-C_4H_9$ ,  $i-C_4H_9$ ,  $t-C_4H_9$ ,  $C_6H_5$  or other alkyl substituted aryl group.

5        These reagents are added in amounts effective to change the MI of the product by decreasing it. In a gas phase, fluid bed reactor the olefin feed is in the presence of about 0.01 to about 1000 ppm molar ratio of these compounds, calculated on the basis of ethylene feed. This compound can be injected into the  
10 reaction (polymerization zone) or added as a co-feed, or admixed with recycle gas, or fed into any other feed stream.

Reagents including water and those containing electron withdrawing atoms have also been employed to control MI by increasing MI and include trialkylaluminum, e.g.,  
15 trimethylaluminum, triethylaluminum, triisobutylaluminum, alkylaluminum chloride, trialkyl borane, and dialkylmagnesium. Some representative formulas are:  $R_2Mg$ ,  $RMgCl$ ,  $R_3Al$ ,  $R_3B$ ,  $R_2AlCl$ ,  $R_2BCl$ ,  $RAI_2$ ,  $RBCl_2$ ,  $R_3Al_2Cl_3$ ,  $R_3B_2Cl_3$ , where R may be H,  $CH_3$ ,  $C_2H_5$ ,  $n-C_3H_7$ ,  $i-C_3H_7$ ,  $n-C_4H_9$ ,  $i-C_4H_9$ ,  $t-C_4H_9$ ,  $C_6H_5$  or other alkyl  
20 group, or aryl group, or substituted aryl group. These reagents are added in amounts effective to change the MI of the product by increasing it.

Note that although these reagents can change MI, they do not increase fines production.

25        In a gas phase, fluid bed reactor, the olefin feed is in the presence of about 10 to about 1000 ppm molar ratio of these compounds, calculated on the basis of ethylene feed. In addition to increasing MI the reagent does not increase fines production. This compound can be injected into the reaction  
30 (polymerization zone) or added as a co-feed, or admixed with recycle gas, or injected with a comonomer.

Hydrogen may be used as a chain transfer agent in the polymerization reaction of the present invention. The ratio of hydrogen/ethylene employed will vary from 0 to 2, preferably 0  
35 to 0.5, moles of hydrogen per mole of ethylene in the gas phase. Any gas inert to the catalyst and reactants can also be present in the gas stream.

- 9 -

Reference is now made to the accompanying drawing, Figure 1, which is a schematic drawing of a gas phase fluid bed reactor for olefin polymerization or copolymerization, for use in the process according to the present invention.

5 In Figure 1, a reactor 10 consists of a reaction zone 12, a velocity reduction zone 14 and a distributor plate 20. Although fouling can occur in all of the cold areas (areas in a reactor at a temperature which is less than the temperature at which any component in the gas phase reactor are liquid rather than gaseous) distributor plate fouling is the one most easily detected, since it results in a rapid increase in the pressure drop across the distributor plate due to flow restriction. Such flow restrictions also result in changing fluidization patterns and contribute to reactor operating  
15 problems.

The lowest temperature in the reactor loop is in the reactor inlet beneath the distributor plate. Other areas representing the coldest sections in the fluid bed reactor system include the cooler and piping between the cooler and the  
20 bottom head.

The reaction zone 12 comprises a bed of growing polymer particles and a minor amount of catalyst particles fluidized by the continuous flow of polymerizable and modifying gaseous components. To maintain a viable fluidized bed, the mass gas  
25 flow rate through the bed must be above the minimum flow required for fluidization, and preferably from about 1.5 to about 10 times  $G_{mf}$  and more preferably from about 3 to about 6 times  $G_{mf}$ .  $G_{mf}$  is used in the accepted form as the abbreviation for the minimum mass gas flow required to achieve fluidization,  
30 C. Y. Wen and Y. H. Yu, "Mechanics of Fluidization", Chemical Engineering Progress Symposium Series, Vol. 62, p. 100-111 (1966).

The distribution plate 20 serves the purpose of supporting the bed and distributing recycle gas through the bed at a rate  
35 sufficient to maintain fluidization of the bed. Fluidization is achieved by a high rate of gas recycle to and through the bed, typically in the order of 50 to 200 times the rate of feed

- 10 -

of make-up gas. Make-up gas is fed to the bed at a rate equal to the rate at which particulate polymer product is formed by reaction plus any vent or other losses. The composition of the make-up gas is determined by a gas analyzer usually piped across  
5 the compressor. The composition of the make-up gas is continuously adjusted to maintain an essentially steady state gaseous composition within the reaction zone.

The portion of the gas stream which does not react in the bed (the recycle gas) passes a velocity reduction zone 14, where  
10 entrained particles are given an opportunity to drop back into the bed, and is compressed in a compressor 25; the gas stream then passes through a heat exchanger 26 and is returned to the bed.

The distribution plate 20 serves the purpose of diffusing  
15 recycle gas through the bed at a rate sufficient to maintain fluidization. The plate may be a screen, slotted plate, perforated plate, a plate of the bubble cap type, and the like. The elements of the plate may all be stationary, or the plate may be of the mobile type disclosed in US-A-3298792.

20 Under a given set of operating conditions, the fluidized bed is maintained at essentially a constant height by withdrawing a portion of the bed as product at a rate equal to the rate of formation of the particulate polymer product. The catalyst is injected into the bed at a point above the  
25 distribution plate at a rate equal to its consumption. Injection of the catalyst is via a catalyst feeder. Since the catalysts used in the practice of this invention are highly active, injection of the fully activated catalyst into the area below the distribution plate may cause polymerization to begin  
30 there and eventually cause plugging of the distribution plate. Injection into the bed, instead, aids in distributing the catalyst throughout the bed and precludes the formation of localized spots of high catalyst concentration.

The catalyst used in the invention comprise a carrier, an  
35 alumoxane and at least one metallocene. The catalyst is desirably free-flowing and particulate in form comprising dry powder particles having a particle size of from about 1 micron

- 11 -

to about 250 microns, preferably from about 10 microns to about 150 microns. The catalysts which contain only one transition metal in the form of a metallocene have an activity of at least about 200 kg polymer/g of transition metals. The aluminoxane and metallocene loading on the carrier is such that the amount of aluminum, (elemental basis) provided by the aluminoxane, on the carrier ranges from 1 to 40 weight percent, preferably from 5 to 30 weight percent, and most preferably from 5 to 15 weight percent. The optimum MAO loading is in the range of 3 to 15 mmoles of aluminum per gram of silica carrier; if a silica carrier is overloaded with MAO, the catalyst activity is lower and the catalyst particles agglomerate with attendant problems of transferring the catalyst.

The amount of metallocene on the carrier ranges, on a transition metal ( $M_{Tr}$ ) elemental basis, from 0.001 to 10 weight percent, preferably from 0.01 to 1.0, and most preferably from 0.05 to 0.4 weight percent. Accordingly the ratio of Al: $M_{Tr}$  (on an elemental basis) in the catalyst can range from 25 to 10,000, usually within the range of from 50 to 1000 but preferably from about 75 to 500, and most preferably from 100 to 200.

To form catalysts of the invention, all catalyst components can be dissolved with alumoxane and impregnated into the carrier. Catalyst preparation can be undertaken under anhydrous conditions and in the absence of oxygen. In a process described below, the carrier material is impregnated with alumoxane, preferably methylalumoxane. The class of alumoxanes comprises oligomeric linear and/or cyclic alkylalumoxanes represented by the formula:  $R-(Al(R)-O)_n-AlR_2$  for oligomeric, linear alumoxanes; and  $(-Al(R)-O)_m$  for oligomeric cyclic alumoxane wherein n is 1-40, preferably 10-20, m is 3-40, preferably 3-20, and R is a  $C_1-C_8$  alkyl group and preferably methyl.

MAO is a mixture of oligomers with a very wide distribution of molecular weights and usually with an average molecular weight of about 1200. MAO is typically kept in solution in toluene.

The volume of the solution comprising an alumoxane and a solvent therefor can vary, depending on the catalyst sought to

- 12 -

be produced. In a preferred embodiment of alumoxane incorporation into the carrier, one of the controlling factors in the alumoxane incorporation into the carrier material catalyst synthesis is the pore volume of the silica. In this preferred embodiment, the process of impregnating the carrier material is by infusion of the alumoxane solution, without forming a slurry of the carrier material, such as silica, in the alumoxane solution. This is undertaken with agitation. The volume of the solution of the alumoxane is sufficient or less than that required to fill the pores of the carrier material without forming a slurry in which the volume of the solution exceeds the pore volume of the silica; preferably, the maximum volume of the alumoxane solution does not exceed the total pore volume of the carrier material sample: this maximum volume of the alumoxane solution ensures that no slurry of silica in solvent is formed in this step.

By way of example, if the pore volume of the carrier material is  $1.65 \text{ cm}^3/\text{g}$ , then the volume of alumoxane will be equal to or less than  $1.65 \text{ cm}^3/\text{g}$  of carrier material. Thus, the maximum volume of solution (of metallocene and alumoxane) will equal the total pore volume of the carrier, e.g. silica, which is the pore volume in, e.g.,  $\text{cm}^3/\text{g}$ , times the total weight of the carrier used. As a result of this provision, the impregnated carrier material will appear dry immediately following impregnation although the pores of the carrier may be filled with inter alia solvent. The preferred solvent for the aluminoxane, e.g. methylalumoxane, is toluene. The advantage is that the impregnation is undertaken in a single solvent system.

Solvent may be removed from the alumoxane impregnated pores of the carrier material by heating and/or under a vacuum or purged with heating in an inert gas, such as nitrogen. If elevated temperature is employed, the temperature conditions in this step are controlled to reduce, if not to eliminate, agglomeration of impregnated carrier particles and/or crosslinking of the alumoxane. In this step, solvent can be removed by evaporation effected at relatively low elevated

- 13 -

temperatures in the range of 40 to 60°C to obviate agglomeration of catalyst particles and crosslinking of the alumoxane.

Preferably drying is undertaken at 45°C or less for 5 to 7 hours. Although solvent can be removed by evaporation at 5 relatively higher temperatures than the 40 to 60°C range described above, very short heating times schedules must be employed to obviate agglomeration of catalyst particles and crosslinking of the alumoxane, with reduction of catalyst activity. Thus, an active catalyst has been produced at 10 evaporation temperature of 110°C in less than 10 seconds (at extremely short heating times), whereas at 45°C, drying can be undertaken for periods of 24 hours. A vacuum can be employed to facilitate drying.

In a preferred embodiment, the metallocene is added to the 15 solution of the alumoxane prior to impregnating the carrier with the solution. Again the maximum volume of the alumoxane solution also containing the metallocene is the total pore volume of the carrier material sample. The mole ratio of aluminum provided by aluminoxane, expressed as Al, to 20 metallocene metal expressed as M (e.g. Zr), preferably ranges from 50 to 1000, preferably 75 to 500, and most preferably 100 to 200. The Al:M<sub>T</sub> ratio can be directly controlled.

In a preferred embodiment the alumoxane and metallocene compound are mixed together at ambient temperature for 0.1 to 25 6.0 hours, prior to use in the infusion step. The solvent for the metallocene and alumoxane can be appropriate solvents, such as aromatic hydrocarbons, halogenated aromatic hydrocarbons, ethers, cyclic ethers or esters; preferably it is toluene.

The metallocene compound has the formula  $Cp_mMA_nB_p$  in which 30 Cp is an unsubstituted or substituted cyclopentadienyl group, M is zirconium or hafnium and A and B belong to the group including a halogen atom, hydrogen or an alkyl group. In the above formula of the metallocene compound, the preferred transition metal atom M is zirconium.

35 In the above formula for the metallocene compound, the Cp group is a mono- or a polysubstituted cyclopentadienyl group. The substituents on the cyclopentadienyl group can be preferably

- 14 -

straight-or branched chain  $C_1-C_6$  alkyl groups. The cyclopentadienyl group can be also a part of a bicyclic or a tricyclic moiety such as indenyl, tetrahydroindenyl, fluorenyl or a partially hydrogenated fluorenyl group, as well as a part  
5 of a substituted bicyclic or tricyclic moiety. In the case when  $m$  in the above formula of the metallocene compound is equal to 2, the cyclopentadienyl groups can be also bridged by polymethylene or dialkylsilane groups, such as  $-CH_2-$ ,  $-CH_2-CH_2-$ ,  $-CR'R''-$  and  $-CR'R''-CR'R''-$  where  $R'$  and  $R''$  are short alkyl groups  
10 or hydrogen,  $-Si(CH_3)_2-$ ,  $Si(CH_3)_2-CH_2-CH_2-Si(CH_3)_2-$  and similar bridge groups. If the A and B substituents in the above formula of the metallocene compound are halogen atoms, they belong to the group of fluorine, chlorine, bromine or iodine. If the substituents A and B in the above formula of the metallocene  
15 compound are alkyl groups, they are preferably straight-chain or branched  $C_1-C_8$  alkyl groups, such as methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, n-pentyl, n-hexyl or n-octyl.

Suitable metallocene compounds include bis(cyclopentadienyl)metal dihalides, bis(cyclopentadienyl)metal  
20 hydridohalides, bis(cyclopentadienyl)metal monoalkyl monohalides, bis(cyclopentadienyl)metal dialkyls and bis(indenyl)metal dihalides wherein the metal is zirconium or hafnium, halide groups are preferably chlorine and the alkyl groups are  $C_1-C_6$  alkyls. Illustrative, but non-limiting examples  
25 of metallocenes include bis(n-butylcyclopentadienyl)zirconium dichloride, bis(n-butylcyclopentadienyl)hafnium dichloride, bis(n-butylcyclopentadienyl)zirconium dimethyl, bis(n-butylcyclopentadienyl)hafnium dimethyl, bis(n-butylcyclopentadienyl)zirconium hydridochloride, bis(n-  
30 butylcyclopentadienyl)hafnium hydridochloride, bis(iso-butylcyclopentadienyl)zirconium dichloride, bis(pentamethylcyclopentadienyl)zirconium dichloride, bis(pentamethylcyclopentadienyl)hafnium dichloride, bis(iso-butylcyclopentadienyl)zirconium dichloride, cyclopentadienyl-  
35 zirconium trichloride, bis(indenyl)zirconium dichloride, bis(4,5,6,7-tetrahydro-1-indenyl)zirconium dichloride, and ethylene-[bis(4,5,6,7-tetrahydro-1-indenyl)] zirconium



- 15 -

dichloride.

The metallocene compounds utilized within the embodiment of this art can be used as crystalline solids, as solutions in aromatic hydrocarbons or in a supported form.

5       The carrier material is preferably a solid, particulate, porous, preferably inorganic material, such as an oxide of silicon and/or of aluminum. In the most preferred embodiment, the carrier is silica in the form of spherical particles, e.g., as obtained by a spray-drying process. The carrier material is  
10 preferably used in the form of a dry powder having a particle size of from about 1 micron to about 500 microns, preferably from about 1 micron to about 250 microns, and most preferably about 10 microns to about 150 microns. If necessary, the final catalyst containing carrier material may be sieved to ensure  
15 elimination of large catalyst particles. Presently, elimination of catalyst particles that have a particle size of greater than 500 microns is envisaged; preferably, elimination of particles of greater than 250 micron particle size, and, most preferably, elimination of particles of greater than 150 micron particle  
20 size is undertaken. Sieving of the material is preferably undertaken after impregnation of the carrier with the metallocene and the aluminoxane. This is particularly desirable when the catalyst contains only one transition metal in the form of a metallocene and which is used to form narrow molecular  
25 weight LLDPE, to reduce and/or to eliminate gels in the final polyolefin product and to eliminate reactor hot spots, thereby ensuring reactor continuity, particularly in the gas phase fluid bed process.

The surface area of the carrier is preferably at least 3  
30  $\text{m}^2/\text{g}$ , preferably, 5 to  $1200 \text{ m}^2/\text{g}$  and most preferably at least about  $50 \text{ m}^2/\text{g}$  up to about  $350 \text{ m}^2/\text{g}$ . The pore volume of the carrier will usually range from  $0.1$  to  $5 \text{ cm}^3/\text{g}$ , preferably from  $0.1$  to  $3.5 \text{ cm}^3/\text{gm}$ . The carrier material should preferably be dry, that is, free of absorbed water.

35       Preferably, the carrier is silica, which contains [OH] groups. The hydroxyl group of the silica may range from greater than  $0.5 \text{ mmole/g}$  silica to  $2.5 \text{ mmole/g}$  silica. This range is

- 16 -

favoured by lower drying, dehydration and/or calcination temperatures.

The silica hydroxyl (herein silanol, silica hydroxy and silica hydroxyl are used interchangeably) groups are detectable  
5 by IR spectroscopy. Quantitative determinations of the hydroxyl concentration on silica are made by contacting a silica sample with methyl magnesium iodide and measuring methane evolution (by pressure determination).

Dehydration of silica material can be effected by heating  
10 at 100°C to 600°C, preferably from 150°C to 300°C and most preferably at 250°C.

Silica dehydrated at 600°C (for about 16 hours) will have a surface hydroxyl concentration of about 0.7 mmole/g silica. Silica dehydrated at 800°C will be a silica with 0.5 mmole of  
15 silica hydroxy per gram silica. The silica of the most preferred embodiment is a high surface area, amorphous silica (surface area = 300 m<sup>2</sup>/g; pore volume of 1.65 cm<sup>3</sup>/g), and it is a material marketed under the tradenames of Davison 952 or Davison 955 by the Davison Chemical Division of W. R. Grace and  
20 Company. As purchased, the silicas are not dehydrated and must be dehydrated prior to use.

The effect of silica hydroxyl groups on the catalyst activity and productivity is reflected in the Examples below. To produce the highest activity catalysts the silica should  
25 contain hydroxyl groups for contact with the solution containing aluminoxane and metallocene. It has been determined that reaction of the hydroxyl groups of the silica with scavengers, such as trialkylaluminum compounds, e.g., trimethylaluminum (TMA), reduced the activity of the catalyst produced thereby  
30 compared to a catalyst formed with a silica having hydroxyl groups unreacted with such a scavenger. Silicas containing higher hydroxyl numbers produce catalysts of higher activity than silicas of lower hydroxyl numbers. Treating the silica with trimethylaluminum to react with the silanol or silica hydroxy  
35 groups [which, with appropriate molar amount of TMA, the hydroxyl concentration is reduced to 0 (zero) as indicated by IR] prior to catalyst synthesis produced a catalyst with a

- 17 -

productivity of about 200 kg(polymer)/g transition metal. However, this activity is good activity, and the catalyst exhibiting such activity is useful in the processes herein. By comparison, catalysts with a hydroxyl group content of 1.8 mmole/g silica exhibits a productivity of more than 1000 kg(polymer)/g transition metal. The amount of hydroxyl groups, in mmole/g silica can be affected by the dehydration temperatures used to condition the silica. Specifically, the dehydration temperatures of about 600°C reduce the amount of reactive hydroxyl groups available for contact with the solution of aluminoxane and metallocene. By comparison, dehydration temperatures of about 250°C increase the amount of reactive hydroxyl groups available for contact with the solution of aluminoxane and metallocene, relative to the silica heat treated, for dehydration purposes, to 600°C. Thus it has been found that the catalyst made with the silica subjected to dehydration temperatures of 250°C is more active than a catalyst produced with the silica subjected to drying temperatures of 600°C. Accordingly, preferred dehydration and/or calcination temperatures are below 300°C and preferably at 250°C.

Accordingly, the silica used in embodiments of the invention will advantageously contain a silanol concentration of greater than 0.7 mmole OH per g silica; preferably it will contain greater than 0.7 mmole up to 2.5 mmole OH per g of silica. In preferred embodiments, the concentration ranges from 1.6 to 2.0 mmole/g silica.

Both low density (0.88 to 0.939 g/cm<sup>3</sup>) and high density (0.94 to 0.965 g/cm<sup>3</sup> and above) products with high bulk density, low (hexane) extractables and granular morphology can be prepared in the slurry or gas phase reactor with no fouling. The resin produced has a high molecular weight, narrow molecular weight distribution, and homogeneous branching distribution. The catalyst ash contains small amounts of Transition metal (eg Zr) and Al: for example, less than 1 ppm transition metal and 100 ppm Al. The high activity of the catalysts of the invention which also exhibit long catalyst life and produce high bulk density products are significant factors in the unexpected

- 18 -

efficacy of these catalysts in catalytic polymerizations and copolymerizations of olefins.

Ethylene polymers, as well as copolymers of ethylene with one or more  $C_3$ - $C_{10}$  alpha-olefins, can be produced in accordance with the invention. Thus, copolymers having two monomeric units are possible as well as terpolymers having three monomeric units. Particular examples of such polymers include ethylene/1-butene copolymers, ethylene/1-hexene copolymers and ethylene/4-methyl-1-pentene copolymers.

10 Ethylene/1-butene and ethylene/1-hexene copolymers are the most preferred copolymers polymerized in the process of and with the catalyst of this invention. The ethylene copolymers produced in accordance with the present invention preferably contain at least about 80 percent by weight of ethylene units.

15 In one embodiment, the catalyst of the invention exhibits high activity for polymerization of ethylene and higher alpha-olefins and allows the synthesis of ethylene polymers and copolymers with a relatively narrow molecular weight distribution and homogeneous branching distribution. The  
20 molecular weight distribution is determined as MFR (melt flow ratio of  $I_{21}/I_2$  - wherein  $I_{21}$  is measured at 190°C in accordance with ASTM D-1238, Condition F, and  $I_2$  is measured in accordance with ASTM D-1238, Condition E]) which ranges from 15 to 25, in polymerizations of the invention. Branching distribution in  
25 ethylene copolymers is evaluated on the basis of the resin's melting point. Relatively homogeneous branching distribution is one which the melting point ranges from 100 to 120°C, depending on comonomer composition. In this embodiment, the catalyst of the invention contains only one source of transition  
30 metal, a metallocene. More particularly, the copolymer products contain 0.1 to 2 ppm of Zr. The product has an average particle size of 0.015-0.035 inches (0.38 to 0.89 mm), settled bulk density from 22 to 36 lb/ft<sup>3</sup> (350 to 580 kg/m<sup>3</sup>). The narrow molecular weight distribution low density copolymers can  
35 been produced with MI from one to 500 and less than 1, down to 0.0001. The low density products of the invention exhibit a MI which can range from 0.0001 to 500, preferably from 0.1 to 500,

- 19 -

more preferably from 0.1 to 200. One particularly preferred range of MI is 0.5 to 5.0. The low density products of the invention preferably exhibit a melt flow ratio (MFR) of 15 to 25, more preferably from 14 to 20; products with MFR ranging 5 from 16 to 18 have been made.

When films fabricated from the polymers produced by the process of the invention exhibit balanced tear strength, as measured by ASTM D-1922. Furthermore the LLDPE produced by the invention exhibits Dart Drop Impact values as measured by ASTM 10 D-1709 of greater than 800. The products of the catalysis with the catalyst of the invention are substantially free of gels. The films exhibit very low haze values as measured by ASTM D-1003, preferably in the range of 3 to 10, more preferably from 5 to 7. The catalyst ash typically contains less than 1 ppm 15 transition metal (eg Zr) and less than 40 ppm Al.

Because of the excellent comonomer incorporation of the catalyst and the branching homogeneity of the resin, significant amount of hexene saving can be achieved.

MAO (methylalumoxane) is commercially available from Ethyl 20 Chemical and WITCO (previously Schering Berlin) as 10 weight percent and 30 weight percent solutions, which were the sources of MAO used in the Examples.

### Examples

25

#### Preparation of Catalyst A

This catalyst was prepared using silica treated with TMA. PQ 988 IM silica was dehydrated at 600°C for 4 hours. 486 g of this dehydrated silica were reacted with 517 cm<sup>3</sup> of 30 trimethylaluminum (14.8 wt% Al) and dried to a white powder at 80°C.

6.90 g of bis(n-butylcyclopentadienyl) zirconium dichloride, 470 ml of toluene, and 649.7 g of methylaluminoxane (14.1 wt% Al in toluene) were mixed together until the Zr 35 complex dissolved. This catalyst solution was then added slowly into the silica previously treated with trimethylaluminum. The contents were agitated vigorously to make sure the reagent

- 20 -

solution was well-dispersed among the silica support.

The mixture was dried at 45°C for 6 hours until a free flowing powder was obtained. The catalyst was not sieved.

#### 5 Preparation of Catalysts B to I

These catalysts were prepared using silica without TMA treatment.

Catalyst B: Davison 955 silica was dehydrated at 600°C for 4 hours. 500 g of this dehydrated silica were then reacted with  
10 a solution of 7.084 g of (n-butylCp)<sub>2</sub>ZrCl<sub>2</sub> dissolved in 677.6 g of MAO (14.1 wt% Al) in toluene. The Al/Zr molar ratio was 200:1. The catalyst was dried under flowing N<sub>2</sub> at 45°C for 6 hours, and was sieved to remove any particles larger than 150 microns.

15 Catalyst C: Catalyst C was prepared in similar manner to Catalyst B, except that the drying time was 5 hours.

Catalysts D, E, F, G and H: These catalysts were prepared in similar manner to Catalyst C.

Catalyst 8: This catalyst was prepared in similar manner  
20 to Catalyst C, except that Davison 955 silica was dehydrated at 250°C.

#### Gas phase pilot plant reactor results

The above catalysts were used in the pilot plant fluid bed  
25 reactor (13 inch (0.33m) internal diameter, 4ft<sup>3</sup> (0.11m<sup>3</sup>) reaction zone) to evaluate their operability and responses to different process variables. Good reactor operability was achieved after a few adjustments were made to the reactor operating parameters. The catalysts used in this work can be  
30 divided into two types based upon the difference in activity. The Catalyst A fits into the low activity group while all the others fit into the higher activity group. All the catalysts in the high activity group should be considered the same for the below discussion.

35 The resins produced have good settled bulk density (27 to 36 lb/ft<sup>3</sup> (430 to 580 kg/m<sup>3</sup>)) and the fines (defined as finer than 120 Mesh) were less than 5%.

- 21 -

Table 1 gives the results. An analysis of the results in Table 1 demonstrates:

1. Tests 1 and 2 indicate that the Melt Index of the product unexpectedly decreases with increasing temperature.
- 5 2. Tests 3 and 4 reconfirm the effect of temperature with a different catalyst formulation which is about three times more active (about one third ash, Al and Zr).
3. Tests 5 and 6 indicate that, as expected, the MI increases as a result of increasing the hexene gas ratio. However,  
10 further increase in hexene gas ratio to make low density (test 7) actually decreased melt index, which is unexpected. The difference in ethylene partial pressure between tests 7 and 6 does not explain the MI change. An  
15 ethylene partial drop from 206 psi (1.42 MPa) to about 125 psi (0.861 MPa) is required to increase MI from 4.1 (test 7) to 7.1 (test 6).
4. Tests 7 and 8 indicate that MI drops significantly, and unexpectedly, with injection of isopentane into the reactor. This finding is very significant because this  
20 gives an effective way of reducing MI to about 1 without using a temperature increase which can be detrimental to good reactor operation for low density products.
5. Oxygen reduces MI (compare tests 9 and 10 with 7). Also, addition of oxygen in combination with isopentane (test  
25 12) can give fractional MI resin. This result is unexpected, particularly because the catalyst contains aluminum alkyl. Any oxygen addition was expected to be scavenged by the aluminum alkyl before modifying the catalyst site.
- 30 6. Water is found to increase MI (compare tests 7 and 11). This result is unexpected since the catalyst contains aluminum alkyl. Any water addition was expected to be scavenged by the aluminum alkyl before modifying the catalyst site.
- 35 In addition to isopentane, oxygen and water, other additives were explored, such as TIBA, carbon dioxide, carbon monoxide and acetylene. The results indicated TIBA increases

- 22 -

MI, CO<sub>2</sub> and CO decrease MI while acetylene does not have a significant effect. However, all these modifiers do not have the same impact on the catalyst activity in achieving similar changes in MI.

5       The results are given in Table 2. An analysis of the results in Table 2 demonstrates:

1. Tests 1 and 2 show TIBA increases MI significantly. In addition, the activity of the catalyst increased significantly in the presence of TIBA (compare the  
10       Zirconium ppm in the product). Preliminary tests using other electron withdrawing compounds such as TMA and TEAL indicate all of these compounds may not effect the MI similarly on this catalyst.
2. Tests 3 and 4 compared with 2 show that carbon dioxide  
15       reduces the MI with this catalyst, which is not expected from the effect of carbon dioxide on other catalysts. Similarly, tests 5 and 6 compared with 2 show carbon monoxide also reduces MI. However, the catalyst activity drops significantly more with carbon monoxide compared to  
20       the effect of carbon dioxide (compare 4 and 6).
3. Unlike the results reported in Table 1, where we could make 1 MI using isopentane alone (test 8, Table 1), addition of a modifier was necessary along with isopentane while doing tests reported in Table 2. We believe this is  
25       due to difference in the background level of modifiers.
4. Electron donating compounds, e.g. CO, CO<sub>2</sub>, and electron withdrawing compounds, e.g., TIBA, can modify our metallocene catalysts to change the resin MI. Other  
30       electron donating compounds can be ethers, alcohol, peroxides, ketones, esters, thioethers, carbonyls, amines, phosphines, phenols, etc. Other electron withdrawing  
35       compounds can be trialkylaluminum, alkyl aluminum chloride, trialkyl borane, etc. It is believed that these modifiers can also work in gas phase, slurry or high pressure process.

Using these catalysts, preliminary product scoping in the fluid bed reactor has been carried out. As a result of the



- 23 -

unique combinations of isopentane, hexene, temperature and modifiers that were discovered in this work, it was possible to adjust MI and densities in a very broad range; ranging from 0.915 to 0.962 g/cm<sup>3</sup> by varying comonomer level (hexene or  
5 butene) and melt index ranging from 0.5 to 250 by varying the reactor temperature, ethylene partial pressure, isopentane, oxygen (or carbon dioxide, carbon monoxide) and hydrogen.

It is believed that significantly lower or higher melt index (less than 0.2 or greater than 500) materials can be  
10 produced if necessary. Similarly, it is expected that products can be made with lower density than 0.915 g/cm<sup>3</sup> (0.905 g/cm<sup>3</sup> or lower) and with higher density than 0.962, if necessary.

Table 1

Test Catalyst		Reactor Conditions										
		Temp °C	IC5 MPa	Modifier	Modifier ppm	C <sub>6</sub> /C <sub>2</sub> mole ratio	Ethylene Partial MPa	Ash ppm	Alum ppm	Zirc ppm	MI*	Density g/c <sup>3</sup>
1	A	65	0	none	0	0.0088	1.80	777	111	1.95	4.1	0.931
2	A	85	0	none	0	0.0087	1.67	746	105	1.75	2.3	0.93
3	B	85	0	none	0	0.0089	1.53	266	32	0.6	2.5	0.931
4	B	75	0	none	0	0.0098	1.50	275	--	0.47	4.4	0.931
5	C	77.5	0	none	0	0.003	1.24	276	30	0.44	2.6	0.943
6	C	77.5	0	none	0	0.01	1.27	250	26.2	0.5	7.1	0.929
7	F	77.5	0	none	0	0.021	1.42	237	37.6	0.3	4.1	0.918
8	D	77.5	0.30	none	0	0.016	1.28	331	44	0.46	1	0.918
9	E	77.5	0	oxygen	0.4	0.016	1.24	423	52	1.1	2.4	0.919
10	E	77.5	0	oxygen	1	0.016	1.30	606	68.4	1.3	1.7	0.919
11	G	77.5	0	water	4	0.016	1.30	280	22	0.5	6.1	0.922
12	H	77.5	0.36	oxygen	0.3	0.018	1.34	446	65	1	0.6	0.919

\* MI is measured in g/10 min.

TABLE 2  
Reactor Conditions

Test Catalyst	Temp °C	IC5 MPa	Modifier	Modifier ppm	C <sub>6</sub> /C <sub>2</sub> mole ratio	Ethylene Partial MPa	Ash ppm	Alum ppm	Zirc ppm	MI'	Density g/c <sup>3</sup>
1	I	77.5	0.36	TIBA <sup>**</sup>	345	0.02	129	33.8	0.3	3.7	0.9208
2	I	77.5	0.32	none	0	0.017	155	20	0.46	1.7	0.921
3	I	77.5	0.32	CO <sub>2</sub>	0.5	0.107	209	21	0.44	1.5	0.918
4	I	77.5	0.32	CO <sub>2</sub>	1.14	0.018	186	32	0.7	1.1	0.919
5	I	77.5	0.32	CO	1	0.019	386	57	1.3	0.8	0.9175
6	I	77.5	0.30	CO	0.65	0.019	325	42	0.83	1.2	0.917
7	I	77.5	0.33	C <sub>3</sub> H <sub>2</sub>	1.12	0.017	203	21.7	0.5	1.5	0.9185

\* MI is measured in g/10 min.

\*\* Aluminum alkyl Tri-isobutyl Aluminum

-26-

Claims

1. A process for the polymerization of ethylene or the copolymerization of ethylene with an alpha olefin of 3 to 10 carbon atoms, produces resin having a MI (g/10 min.) value in the range of 0.0001 to 500, (wherein MI is , wherein the process comprises:
- 10 (a) fluidizing a particulate, activated supported metallocene catalyst, in a fluid bed gas phase reactor, wherein the catalyst comprises a support, a transition metal ( $M_{Tr}$ ) and Al, wherein the amount of  $M_{Tr}$  (elemental basis) ranges from 0.001 to 10 weight percent, the amount Al (elemental basis) ranges from 1 to 40 weight percent and the Al: $M_{Tr}$  ratio (elemental basis) ranges from 25 to 10000;
  - 15 (b) contacting said catalyst with a feed selected from the group consisting of (1) ethylene, (2) ethylene admixed with hydrogen, (3) ethylene admixed with an alpha olefin of 3 to 10 carbon atoms, and (4) ethylene admixed with hydrogen and an alpha olefin of 3 to 10 carbon atoms, to produce polymerized product;
  - 20 (c) maintaining a polymerization pressure of less than 1000 psi (6.9 MPa) and a polymerization temperature in the range of 55°C to 115°C;
  - 25 (d) contacting the fluidized catalyst with a reagent to increase or decrease the MI of the polymerized product; and
  - (e) recovering polymerized product.
- 30 2. A process according to Claim 1, wherein the reagent is isopentane and/or an electron donating compound to reduce the MI of the polymerized product.
3. A process according to Claim 2, wherein the isopentane is  
35 used at a partial pressure of from 2 to 80 psi (14 to 550 KPa).
4. A process according to Claim 2, wherein the electron

-27-

donating compound is used in an amount ranging from 0.01 to 500 ppm molar ratio to ethylene.

5. A process according to Claim 2, wherein the electron donating compound is selected from the group consisting of oxygen, carbon monoxide and carbon dioxide.

6. A process according to claim 2, wherein the isopentane is co-fed with the electron donating compound, which is selected from the group consisting of oxygen, carbon monoxide and carbon dioxide.

7. A process according to Claim 1, wherein the reagent is water or an electron withdrawing compound to increase the MI of the polymerized product.

8. A process according to Claim 1, wherein the support is silica, alumina or silica/alumina.

9. A process according to Claim 8, wherein the catalyst is in the form of porous amorphous particles having a particle size in the range of 1 to 500 microns which comprise silica, a  $M_{Tr}$ , and Al, wherein the Al: $M_{Tr}$  ratio ranges from 70 to 350; wherein said silica has a pore volume of 0.1 to 5 cm<sup>3</sup>/g, and has a concentration of hydroxyl groups in the range of 0 to 2.5 mmole/g of silica; wherein said catalyst is prepared, in activated form, by contacting said silica with a volume of a mixture comprising a metallocene and an alumoxane, wherein said volume of said mixture is no greater than the total pore volume of said dehydrated silica; wherein said metallocene has a formula,  $Cp_mMA_nB_p$ , wherein Cp is a substituted cyclopentadienyl group; m is 1 or 2; M is zirconium or hafnium; and each of A and B is selected from the group consisting of a halogen atom, a hydrogen atom, an alkoxyl group and an alkyl group, providing that  $m+n+p$  is equal to the valency of the metal M; wherein said alumoxane has the formula  $R-(Al(R)-O)_n-AlR_2$  for oligomeric linear alumoxanes, or has the formula  $(-Al(R)-O)_m$  for

-28-

oligomeric cyclic alumoxane, wherein n is 1-40, m is 3-40, and R comprises a C<sub>1</sub>-C<sub>8</sub> alkyl group.

10. A process according to Claim 9, wherein the metallocene is  
5 selected from the group consisting of bis(n-butylcyclopentadienyl)metal dihalides, bis(n-butylcyclopentadienyl)metal hydridohalides, bis(n-butylcyclopentadienyl)metal monoalkyl monohalides, bis(n-butylcyclopentadienyl)metal dialkyls and bis(indenyl)metal  
10 dihalides.

11. A process according to Claim 10, wherein the metallocene is bis(isobutylcyclopentadienyl) zirconium dichloride.

15 12. A process according to Claim 1, wherein said polymerization pressure is maintained at less than 400 psi (2.8 MPa).

1/1

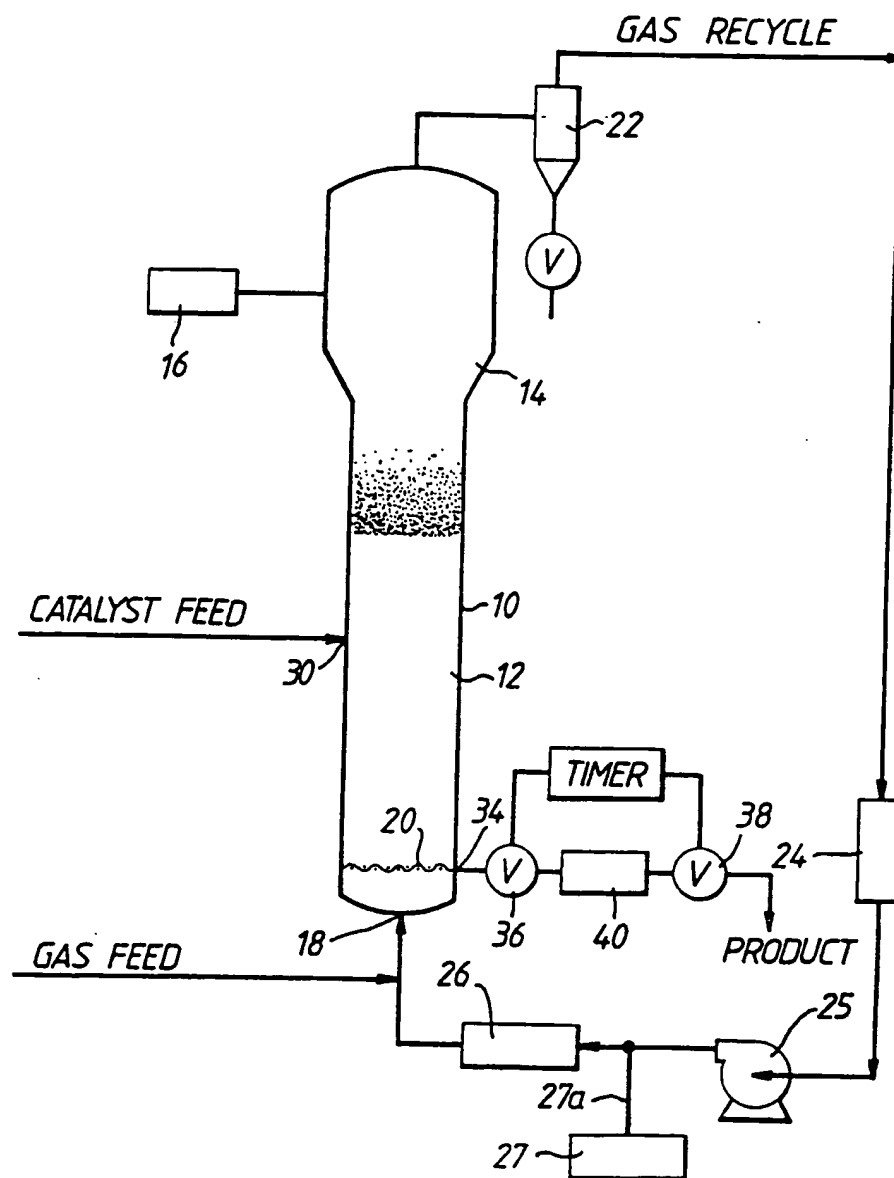


Fig. 1

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US94/12586

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : C08F 2/34; 4/648; 10/02

US CL : 526/129, 160

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 526/129, 132, 141, 142, 151, 153, 160, 165, 901

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP, A, 0 515 132 (MITSUI PETROCHEMICAL INDUSTRIES, LTD.) 25 November 1992, page 10, lines 23-28.	1, 7, 8, 12
Y	US, A, 4,931,517 (FUJITA) 05 June 1990, column 2, lines 38-47; column 6, lines 43-45 and 58-60 and Examples 10 and 11.	1-4, 8, 12
A	US, A, 4,536,484 (LACOMBE ET AL.) 20 August 1985.	1-12
A	US, A, 4,794,096 (EWEN) 27 December 1988.	1-12
A	US, A, 4,912,075 (CHANG) 27 March 1990.	1-12

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

24 JANUARY 1995

Date of mailing of the international search report

23 FEB 1995

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

FRED M. TESKIN

Telephone No. (703) 308-2351



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US94/12586

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5,206,199 (KIOKA ET AL.) 27 April 1993.	1-12
A,P	US, A, 5,332,706 (NOWLIN ET AL.) 26 July 1994.	1-12

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> C08F 4/60, 10/00, 110/02, 110/06, 110/14, 210/02, 210/06, 210/14, 23/16, C09J 123/00, C10M 119/00, C09D 123/00, C08J 5/18, C08F 32/04, 214/18, 220/22, C08G 61/04, C07C 251/00		<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 96/23010</b>
			<b>(43) International Publication Date:</b> 1 August 1996 (01.08.96)
<b>(21) International Application Number:</b> PCT/US96/01282		<b>(74) Agents:</b> EVANS, Craig, H. et al.; E.I. du Pont de Nemours and Company, Legal Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).	
<b>(22) International Filing Date:</b> 24 January 1996 (24.01.96)			
<b>(30) Priority Data:</b> 08/378,044 24 January 1995 (24.01.95) US 08/415,283 3 April 1995 (03.04.95) US 08/473,590 7 June 1995 (07.06.95) US 60/007,375 8 August 1995 (08.08.95) US 60/002,654 22 August 1995 (22.08.95) US		<b>(81) Designated States:</b> AL, AM, AU, BB, BG, BR, CA, CN, CZ, EE, FI, GE, HU, IS, JP, KP, KR, LK, LR, LT, LV, MD, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, TR, TT, UA, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
<b>(71) Applicants:</b> E.I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19898 (US). UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL [US/US]; Office of Technology Development, Campus Box 4105, 308 Bynum Hall, Chapel Hill, NC 27599-4105 (US).		<b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
<b>(72) Inventors:</b> JOHNSON, Lynda, Kaye; Apartment SB2, 402 Foulk Road, Wilmington, DE 19803-3805 (US). KILLIAN, Christopher, Moore; 406 Summerwalk Circle, Chapel Hill, NC 27514 (US). ARTHUR, Samuel, David; 3214 North Monroe Street, Wilmington, DE 19802-2654 (US). FELDMAN, Jerald; 16 Cinamon Drive, Hockessin, DE 19707-1349 (US). McCORD, Elizabeth, Forrester; 514 Hemlock Drive, Hockessin, DE 19707-9361 (US). McLAIN, Stephan, James; 202 Old Mill Lane, Wilmington, DE 19803-4922 (US). KREUTZER, Kristina, Ann; Apartment 2C, 4 Doe Run Court, Wilmington, DE 19808-2059 (US). BENNETT, Margaret, Anne; 1 Brandywine Falls, Wilmington, DE 19806 (US). COUGHLIN, Edward, Bryan; Apartment E, 2227 Prior Road, Wilmington, DE 19809 (US). ITTEL, Steven, Dale; 2802 Landon Drive, Wilmington, DE 19810-2213 (US). PARTHASARATHY, Anju; 1562 Pottstown Pike, Glenmoore, PA 19343-9614 (US). TEMPEL, Daniel, Joseph; Apartment 10, 400 Davie Road, Carrboro, NC 27510 (US). BROOKHART, Maurice, S.; 944 Old Orchard Road, Chapel Hill, NC 27514 (US).		<b>(88) Date of publication of the international search report:</b> 5 December 1996 (05.12.96)	
<b>(54) Title:</b> $\alpha$ -OLEFINS AND OLEFIN POLYMERS AND PROCESSES THEREFOR			
<b>(57) Abstract</b>  Disclosed herein are processes for polymerizing ethylene, acyclic olefins, and/or selected cyclic olefins, and optionally selected olefinic esters or carboxylic acids, and other monomers. The polymerizations are catalysed by selected transition metal compounds, and sometimes other co-catalysts. Since some of the polymerizations exhibit some characteristics of living polymerizations, block copolymers can be readily made. Many of the polymers produced are often novel, particularly in regard to their microstructure, which gives some of them unusual properties. Numerous novel catalysts are disclosed, as well as some novel processes for making them. The polymers made are useful as elastomers, molding resins, in adhesives, etc. Also described herein is the synthesis of linear $\alpha$ -olefins by the oligomerization of ethylene using as a catalyst system a combination of a nickel compound having a selected $\alpha$ -diimine ligand and a selected Lewis or Bronsted acid, or by contacting selected $\delta$ (a)-diimine nickel complexes with ethylene.			

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## INTERNATIONAL SEARCH REPORT

Intern. Application No

PCT/US 96/01282

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08F4/60 C08F10/00 C08F110/02 C08F110/06 C08F110/14  
 C08F210/02 C08F210/06 C08F210/14 C08L23/16 C09J123/00  
 C10M119/00 C09D123/00 C08J5/18 C08F32/04 C08F214/18

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08F C08L C08G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 93 13140 A (EXXON CHEMICAL PATENTS INC) 8 July 1993	1-6,332, 333,358, 359,366, 384-415, 420-438, 539-554, 560-562
	see table II	
A	EP 0 446 013 A (TOSOH CORP) 11 September 1991	1-6,332, 333,358, 359,366, 384-415, 420-438, 539-554, 560-562
	see the whole document	
	---	
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* documents published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

4 October 1996

Date of mailing of the international search report

21. 10. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+ 31-70) 340-3016

Authorized officer

Kaumann, E

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/01282

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 C08F220/22 C08G61/04 C07C251/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 208 309 A (MCDANIEL MAX P ET AL) 4 May 1993  see claims ---	1,2,4,5, 366, 384-415, 421,422, 426-438, 539-544, 560-562
A	GB 2 058 094 A (NIPPON OIL CO LTD) 8 April 1981  see claims ---	1,2,4,5, 366, 384-415, 421,422, 426-438, 539-544, 560-562

☒ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*A\* document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US96/01282

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 356 692 A (IDEMITSU KOSAN CO) 7 March 1990  see claims ---	7-12, 384-397, 399-417, 419-426, 539,562
A	EP 0 361 363 A (PHILLIPS PETROLEUM CO) 4 April 1990 see page 5; claims ---	403,513, 519
A	WO 94 12699 A (EXXON CHEMICAL PATENTS INC) 9 June 1994  see claims ---	366,414, 511,517, 543
A	EP 0 378 248 A (STUDIENGESELLSCHAFT KOHLE MBH) 18 July 1990 see the whole document ---	496-501
A	EP 0 475 307 A (REXENE PROD CO) 18 March 1992 see the whole document ---	343,344
P,X	JOURNAL OF THE AMERICAN CHEMICAL SOCIETY, vol. 117, no. 23, 14 June 1995, WASHINGTON, XP002003543 JOHNSON ET AL.: "New Pd(II)- and Ni(II)-Based catalysts for Polymerization of Ethylene and alpha-Olefins"  see page 6414 - page 6415 ---	13-25, 37-238, 248-331, 334-342, 367-383, 452-495, 532-537, 545-559
P,X	JOURNAL OF THE AMERICAN CHEMICAL SOCIETY, vol. 118, no. 1, 10 January 1996, WASHINGTON, XP002003542 JOHNSON ET AL.: "Copolymerization of Ethylene and Propylene with Funktionalized Vinyl Monomers by Palladium(II)Catalysts"  see page 267 - page 268 ---	13-25, 37-238, 248-331, 334-342, 367-383, 452-495, 532-537, 545-559
X	FR 2 355 854 A (CHEMPLEX CO) 20 January 1978 see claims; examples 13-15 ---	299-320
X	JOURNAL OF THE AMERICAN CHEMICAL SOCIETY, vol. 88, no. 22, 20 November 1966, WASHINGTON, XP002004034 SAITO, T. ET AL.: "Diethyldipyridylnickel. Preparation, Characterization, and Reactions" see page 5198 - page 5201 ---	243-247
	---	

-/--

## INTERNATIONAL SEARCH REPORT

Internat'l Application No

PCT/US 96/01282

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MACROMOLECULAR RAPID COMMUNICATIONS, vol. 16, no. 1, January 1995, HEIDELBERG, XP002004035 BARTOLINI, S. ET AL: "Enantioselective isotactic alternating copolymerization of styrene and 4-methylstyrene with carbon monoxide catalyzed by a cationic bioxazoline Pd(II) complex" see page 9 - page 14 ---	275-279
X	DD 113 763 A (WALTHER, D., DINJUS, E.) 20 June 1975 ---	280-298, 367-371, 502-509 452-465
A	see the whole document ---	
X	MACROMOLUCULES, vol. 27, no. 10, 9 May 1994, WASHINGTON, pages 2694-2700, XP002003921 JIANG, Z. ET AL: "Stereo- and Enantioselective Alternating Copolymerization of alpha-Olefins with Carbon Monoxide. Synthesis of Chiral Polymers" see page 2696 ---	334-338
X	JOURNAL OF THE AMERICAN CHEMICAL SOCIETY, vol. 116, no. 8, 20 April 1994, WASHINGTON, pages 3641-3642, XP002003922 BROOKHART, M. ET AL: "Polymers with Main-Chain Chirality. Synthesis of Highly Isotactic, Optically Active Poly (4-tert.-butylstyrene-alt-CO) Using Pd (II) Catalysts Based on C2-Symmetric Bioxazoline Ligands" ---	142-151, 216-231, 275-279
A	---	264-266
A	CHEMISCHE BERICHTE, vol. 118, 1985, WEINHEIM, XP002003541 R. DIERCKS, H. TOM DIECK: "Katalytische Cyclotetramerisierung von Propiolsäureestern" see page 428 - page 435 ---	466-475
A	WO 92 12162 A (EXXON CHEMICAL PATENTS INC.) 23 July 1992 ---	13-25, 37-238, 243-325, 339-342, 367-383, 452-495, 502-509, 532-537, 545-559
	---	
	-/--	

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/01282

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JOURNAL OF MOLECULAR CATALYSTS, vol. 35, no. 3, June 1986, LAUSANNE, XP002003923 TOM DIECK ET AL.: "Diazadienes as Control Ligands in Catalysis Part 12* The Nickel Catalyzed Cyclotetramerization of Propargylic Alcohol to Substituted Cyclooctatetraenes and the Structure of 1,3,5,7-Tetrakis(hydroxymethyl)cyclooctate traene" see page 317 - page 328 ---	243-266
X	EP 0 193 202 A (DU PONT) 3 September 1986	31-35
Y	see claims; examples 10,11 ---	31-36
Y	US 4 123 602 A (UKIHASHI HIROSHI ET AL) 31 October 1978 see the whole document ---	31-35
Y	US 3 503 945 A (KIM YUNG KI) 31 March 1970 see the whole document ---	31-35
Y	GB 1 034 197 A (E.I. DU PONT DE NEMOURS AND COMPANY) 29 June 1966 see page 3, line 67 - line 70; claims; examples ---	36
X	EP 0 504 418 A (IDEMITSU KOSAN CO) 23 September 1992	345
A	see page 3, line 32; claims; examples 1,2,6,11  see page 12, line 7 see page 14, line 56 ---	346-357, 360-365, 510-527
X	EP 0 304 671 A (HOECHST AG) 1 March 1989	345-357
A	see claims; examples 3,5-7 ---	360-365
X	US 3 505 301 A (NATTA GIULIO ET AL) 7 April 1970 see examples ---	361-363
X	DATABASE WPI Section Ch, Week 9428 Derwent Publications Ltd., London, GB; Class A18, AN 94-231215 XP002015135 & JP 06 168 625 A (NIPPON ZEON KK) , 14 June 1994 see abstract ---	360-363
A	---	510, 523-527
	---	
	-/--	



## INTERNATIONAL SEARCH REPORT

Intern: al Application No

PCT/US 96/01282

C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CHEMICAL ABSTRACTS, vol. 77, no. 8, 21 August 1972 Columbus, Ohio, US; abstract no. 49803, "MONTECATINI" SOCIETA GENERALE PER L'INDUSTRIA MINERIA E CHIMICA: "Catalytic manufacture of olefin copolymers with three or more monomer components" XP002015133	361-363, 520
A	see abstract  & IT 630 410 A ---	510, 523-527
A	MACROMOLECULES, vol. 25, no. 1, January 1992, WASHINGTON, XP002015130 COLLINS, S. , KELLY, W.M.: "The Microstructure of Poly(cyclopentene) Produced by Polymerization of Cyclopentene with Homogeneous Ziegler-Natta Catalysts" see page 233 - page 237 ---	345-357, 36C-365
X	US 3 927 137 A (BRYSON JAY G) 16 December 1975 see the whole document ---	239,240
X	DE 39 06 434 A (HOECHST AG) 6 September 1990 see page 3, line 34 - page 4, line 43; claims ---	239,240
X	CHEMICAL ABSTRACTS, vol. 121, no. 11, 12 September 1994 Columbus, Ohio, US; abstract no. 134322, WISSING, E ET AL.: "Influence of bulky substituents on the regioselective group-transfer reactions of diorganozinc compounds with N,N'-bis(2,6-di-isopropenyl)-1,4-diaza-1,3 -butadiene" XP002015134 see abstract & INORG. CHIM. ACTA, vol. 220, no. 1-2, 1994, pages 55-61, ---	239,240
X	JOURNAL OF ORGANOMETALLIC CHEMISTRY, LAUSANNE, XP002015131 MUNZ, C., STEPHAN, C., TOM DIECK, H.: "Diazadiene-stabilized palladacyclopent-2-enes and the catalytic addition of various allylic systems to dimethyl acetylenedicarboxylate" see page 413 - page 422 --- -/--	239,240, 243-247

## INTERNATIONAL SEARCH REPORT

Internat. Application No.

PCT/US 96/01282

## C(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ZEITSCHRIFT FÜR NATURFORSCHUNG, vol. 45b, - 1990 TÜBINGEN, XP002015132 BONRATH, W. ET AL.: "Synthese und Struktur von Ni(2,6-iPr <sub>2</sub> C <sub>6</sub> H <sub>3</sub> N=CH-CH=NC <sub>6</sub> H <sub>3</sub> -2,6-iPr <sub>2</sub> ) <sub>2</sub> " see page 1647 - page 1650 -----	239,240, 243-252

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 96/01282

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 395  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:  
Claim 395 is a product claim and refers back to claim 14, which is a process claim
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

SEE FURTHER INFORMATION SHEET

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/210

1. Claims : 1-25, 37-238, 243-344, 358, 359, 366 as far as they relate to claims 358, 367-394, 396-509, 510-520 and 523-527 as far as they relate to claims 358, 528-552, 554-562.
2. Claims : 26-36
3. Claims : 239-242
4. Claims : 345-357, 360-365, 366 as far as they relate to all mentioned claims except 358, 510-527.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/01282

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
WO-A-9313140	08-07-93	CA-A-	2126317	08-07-93
		EP-A-	0618931	12-10-94
		JP-T-	7501846	23-02-95
		US-A-	5547675	20-08-96
-----				
EP-A-0446013	11-09-91	CA-A-	2037618	07-09-91
		DE-D-	69120556	08-08-96
		JP-A-	3277610	09-12-91
		US-A-	5324799	28-06-94
-----				
US-A-5208309	04-05-93	AU-B-	651919	04-08-94
		AU-A-	3188393	05-08-93
		BR-A-	9300362	24-08-93
		CA-A-	2081798	01-08-93
		CN-A-	1074686	28-07-93
		EP-A-	0553875	04-08-93
		HU-A,B	64980	28-03-94
		JP-A-	5271340	19-10-93
		US-A-	5274056	28-12-93
		ZA-A-	9300320	19-08-93
-----				
GB-A-2058094	08-04-81	JP-C-	1416129	10-12-87
		JP-A-	56038308	13-04-81
		JP-B-	60024805	14-06-85
		DE-A-	3033561	26-03-81
		US-A-	4415718	15-11-83
-----				
EP-A-0356692	07-03-90	JP-A-	2041306	09-02-90
		JP-B-	7091337	04-10-95
		JP-A-	2055708	26-02-90
		JP-B-	7078101	23-08-95
		CA-A-	1338394	11-06-96
		DE-D-	68911065	13-01-94
		DE-T-	68911065	07-04-94
		US-A-	5270420	14-12-93
-----				
EP-A-0361363	04-04-90	US-A-	4966951	30-10-90
		AT-T-	126242	15-08-95
		AU-B-	619592	30-01-92
		AU-A-	4129789	29-03-90

## INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat'l Application No

PCT/US 96/01282

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0361363		CA-A- 1335747	30-05-95
		CN-B- 1031945	05-06-96
		DE-D- 68923751	14-09-95
		DE-T- 68923751	14-12-95
		ES-T- 2075021	01-10-95
		FI-B- 96617	15-04-96
		JP-A- 2120303	08-05-90
		KR-B- 9509110	14-08-95
		NO-B- 175210	06-06-94
		US-A- 5115068	19-05-92
WO-A-9412659	09-06-94	US-A- 5322728	21-06-94
		AU-A- 5601494	22-06-94
		CA-A- 2150006	09-06-94
		CN-A- 1095771	30-11-94
		EP-A- 0670918	13-09-95
		FI-A- 952500	21-07-95
		JP-T- 8503525	16-04-96
		NO-A- 952037	12-07-95
EP-A-0378248	18-07-90	CA-A- 1273027	21-08-90
		EP-A- 0194456	17-09-86
		JP-B- 7005658	25-01-95
		JP-A- 61228003	11-10-86
		US-A- 5093539	03-03-92
		US-A- 4724273	09-02-88
EP-A-0475307	18-03-92	AT-T- 130317	15-12-95
		AU-B- 643315	11-11-93
		AU-A- 8263791	12-03-92
		CA-A- 2050380	08-03-92
		CN-A- 1059731	25-03-92
		DE-D- 69114630	21-12-95
		DE-T- 69114630	18-04-96
		ES-T- 2084074	01-05-96
		JP-A- 4258611	14-09-92
FR-A-2355854	20-01-78	US-A- 4096093	20-06-78
		BE-A- 859544	01-02-78
		DE-A- 2728645	12-01-78

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/01282

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2355854		GB-A- 1527446 US-A- 4150208	04-10-78 17-04-79
DD-A-113763		NONE	
WO-A-9212162	23-07-92	AT-T- 135358 AU-A- 9136391 DE-D- 69117982 DE-T- 69117982 EP-A- 0569388 ES-T- 2085000 JP-T- 6510801 US-A- 5318935	15-03-96 17-08-92 18-04-96 08-08-96 18-11-93 16-05-96 01-12-94 07-06-94
EP-A-0193202	03-09-86	US-A- 4617363 CA-A- 1275544 JP-C- 1718314 JP-B- 3080804 JP-A- 61204208 JP-A- 1103609	14-10-86 23-10-90 14-12-92 26-12-91 10-09-86 20-04-89
US-A-4123602	31-10-78	NONE	
US-A-3503945	31-03-70	BE-A- 702481 FR-A- 1533794 GB-A- 1199172 NL-C- 132440 NL-A- 6711006 BE-A- 707360 FR-A- 1546167 GB-A- 1200932 NL-A- 6716413	09-02-68 27-11-68 15-07-70 12-02-68 30-05-68 05-08-70 04-06-68
GB-A-1034197		DE-A- 1595071 FR-A- 1432549 US-A- 3282875	16-04-70 03-06-66 01-11-66
EP-A-0504418	23-09-92	CA-A- 2070654 WO-A- 9206123 JP-A- 5262821	06-04-92 16-04-92 12-10-93

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/01282

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0504418		JP-A- 5112621	07-05-93
		JP-A- 5132590	28-05-93
		JP-A- 5017527	26-01-93
-----			
EP-A-0304671	01-03-89	DE-A- 3726325	16-02-89
		AU-B- 605897	24-01-91
		AU-A- 2043688	09-02-89
		DE-A- 3871657	09-07-92
		ES-T- 2043745	01-01-94
		JP-A- 1066216	13-03-89
		US-A- 5204429	20-04-93
-----			
US-A-3505301	07-04-70	NONE	
-----			
US-A-3927137	16-12-75	NONE	
-----			
DE-A-3906434	06-09-90	NONE	
-----			



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**